

Proposal

For Supply, Installation, Testing & Commissioning
Of

**Subject: Proposal for Supplying, Installation, Testing & Commissioning of
financial Connection for LT 77 kW Photovoltaic System as per Consumer
Requirement.**

Customer Address

Md. SAIF UDDIN AHSAN Sir

Dag#5289 Dokkin khan shordar Bari



Supplier Address:

Office Address: House-# 29/B, Road # 1/D, Nikunja-02, Khilkhet, Dhaka 1229.

e-mail: powerlinetech2019@gmail.com,

Cell No: +880+ 01304742061,

Head Office Address

House # 22, Road # 04, Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # kha, 99/1/ka, East Namapara Koborstan Road, Desco East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2019@gmail.com

Description Of Meter Load

Single Phase Meter 13x With 65 KW load -- 13 x 65 = 65 KW

Three Phase Meter 1x with 12 KW load -- 1 x 12 = 12 KW

Total Load = 77 KW

7	5 KW	5 KW
6	5 KW	5 KW
5	5 KW	5 KW
4	5 KW	5 KW
3	5 KW	5 KW
2	5 KW	5 KW
1	12 KW	5 KW



Head Office Address

House # 22, Road # 04 , Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # kha , 99/1/ka, East Namapara Koborsthan Road, Desco East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2019@gmail.com

MATERIALS

01	Application + Visiting+Bkash Cost			1,000/-
02	Three phase Pre-Paid Meter	1NO	30000 x 1	30000/-
03	Single phase Pre-Paid Meter	13NOS	5500 x13	71,500/-
04	Material Charges, CMO/Customize			25, 000/-
05	Cable 35 RM	40Meter	35 x 3000	1,05,000/-
06	Vat + Tax			12,000/-
07	Demand not			15,000/-
08	Meter Inspection Fee in LT			8,000/-
09	Solar Installation and Visiting	3000 Watt	3000x50	1,50,000/-
10	Line Man Service Charge and Clip etc.			5,000/-
11	Office cost			50,000/-
			Grand Total	4,81,500/-

Power Line Tech

In word: Four Lakh Eighty One Thousand Five Hundred Taka Only.

Sadia Jahan (Bristy)
CEO
Power Line tech
Cell: 01304742061



Head Office Address

House # 22, Road # 04, Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # kha, 99/1/ka, East Namapara Koborslan Road, Desco East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2019@gmail.com

INTRODUCTION:

A Solar PV panel turns sunlight into direct including (Charge controller+ Inverter) one box system; (AC) Current Electricity produce by a solar PV is measured in watts off peak 1 phase AC bus bar connection. PV panel come in different size and more PV panels are connected together, the solar PV panels are connected to the solar on grid System. 1 phase digital Meter running consumptions (k w h) Daily off peak hour. Consumer falsity Desco billing unit.

PAYMENT:

- A) 60% of the total order value will be paid in along with the technically or commercially clear work order.
- B) 35% of the total order value will be paid at the time of delivery.
- C) 5% of the total order value will be paid on completion of all works concerned Installation, Connections, Testing and Commissioning, Ten days (DUE) 5% Taka Given post date check after demand note, Check Clearance after 10 dayes complete Connection.
- D) Mode of payment : Pay order/ Bank Draft/ Account Payee Cheque in favor of **Power Line Tech.**

With best regards,

Sadia Jahan (Bristy)
CEO
Power Line Tech
Cell: 01304742061,

Md. Washim Alam
COO
Power Line Tech
Cell: 01612459157



Head Office Address

House # 22, Road # 04 , Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # kha , 99/1/ka, East Namapara Koborsihan Road, Desco East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2019@gmail.com

TECHNICAL SPECIFICATION

Solar Panel/Photovoltaic Modules

Sl. no	Description	Unit	Particulars
01	Description of the item		Photovoltaic Module (Monocrystalline)
02	Name of the manufacturer		Changfeng, China
03	Standard		in according to the IEC 61215/2009
			Standard
04	Type of solar cells		Polycrystalline
05	Out/Maximum power		550wp
06	Power Tolerance		± 5%
07	Nominal voltage	V	12/24Vdc
08	Voltage at Pmax(Vmp)	V	36.8Vdc
09	Current at Pmax(Imp)	Amp	3.1Amp
10	Warranted at Minimum Plaz	WP	25 yrs limited warranty of 75% power output
11	Number of cells in series	No	72 cells
12	Open circuit voltage (Voc)	V	43.8Vdc
13	Short circuit (Isc)	Amp	3.1Amp
14	Cell efficiency		18%
15	Temperature Cycling range		-40°C to +85°C
16	Humidity Freez/Damp Heat		75%RH
17	Static load front and backle g. wind)		Minimum 500d
18	Front loading		Minimum 113 Pa
19	Hailstone Impact		Minimum 25 mm
20	Junction box		IP 67 Rated
21	Conversion efficiency of solar	Km/h	Minimum 13.9%
22	Name of the manufacturer		Made in China (Cell Germany)
23	Dimension		Mentioned the quality required

(Signature)

Head Office Address

House # 22, Road # 56, Mirpur # 12, Kailash, Dhaka - 1225

Office Branch Address

House # 14, White, East Banglapur Kailash Road, Sector East Side, Kailash, Dhaka - 1225

Email: powerlinetech2514@gmail.com

MATERIALS

SL-NO	Item Description	QTY	TOTAL= QTY/WATT/VA/NOS	Remarks
01	Solar PV Module	(500Wx6)	3000 Watt	
02	On Grid Inverter	3000 Watt	1 No's	
03	1 Phase Digital Cell Meter	1 No's	No's	01 Job
04	Circuit Breaker DP 30,A Box Largent.	2 No's	2 No's	01 Job
05	Transmission And Caring			01 Job
06	Panel Structure 1.5 & Royal Bolt	As Per Required	As Per Required	01 Job
07	AC Cable/DC Cable (As per as design) 2.5RM BRB & Flexible pipe.	As Per Required	As Per Required	01 Job

Materials Description

System Major Components : 3300 WP
LONGI™-(MONO Panel) Solar Photovoltaic Module – 3000 WP Origin- (Solar - China) Warranty: 10 Years for Solar Module & 15 Years for 70% Power output.
JFY/SOLEX SOLAR- INVERTER-TL 3000 WATT ON GRID SOLAR INVERTER Capacity – 3000 x 1,WATT (12/24/48 Volt System) x 01 no. Origin- Made in China. Warranty: 02 Year Standard Warranty.
Other Accessories: Structure, Cables (B.R.B), Junction Box, Cable Clips, Combiner Box, Insulation Tape, Cable Lug etc all are Bangladeshi made.
Transportation & Installation

If you have any other quires please feel free contract us.
We would be pleased; if we are facilitated with you valued order.



Head Office Address

House # 22, Road # 04 , Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # kha , 99/1/ka, East Namapara Koborstan Road, Desco East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2019@gmail.com

ON GRID INVERTER.

Sl. no	Description	Unit	Particulars
01	Description of the item		TYPE EVARSOL-TL 3000 x10N GRID SOLAR INVERTER.
02	Standard		3000, WATT
03	Nominal DC input voltage	v	12/24/48Volt DC
04	Continuous power rating at 25°C	I	Minimum 3500 VA
05	AC voltage		230v AC±10%
06	AC frequency		50±0.5%hz
07	Continuous AC Rams output at 25°C		Minimum 3.1 AC
08	Idle power(Typical at no load)		Maximum 23w
09	Total harmonic distortion		Typical 2% & Maximum 5%
10	Typical efficiency		Minimum 90%
11	Output voltage regulation		±2% or Better
12	AC per load capacity		Minimum 100 VA for 5Sec
13	DC input voltage range		12/24/48V Dc
14	Name of the manufacturer		Made in China(LC)/Made in Bangladesh

Head Office Address

House # 02, Road # 04, Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # 04, 801A, East Nirmalya Koderchar Road, Dacca East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2013@gmail.com

Warranty

*** A Complete System is guaranteed for one (01) years against any manufacturing defects. Component wise warranty is stated below.***

SL NO	Name of the components	Warranty	Expected life.
01	Solar PV Module	15 Years	20-25 Years
02	Inverter (On grid)	01 Years	4-5 Years

Terms & Conditions. (Before Project Installation solar Present Installation Solar) Desco Approved Demand Certificate copy.

1. Buyer must provide area for solar panel installation. In case of Roof top, Buyer need to certify that the roof is capable of mounting structure weight, and drilling for bolts.
 2. In case of ground mount or roof mount, Buyer must clear the area of shading.
 3. **Power Line Tech.** will provide the panel, inverters, cables and other accessories which are limited up to a common output point after the inverter.
 4. **Power Line Tech.** will provide timelines for installation after the initial agreement between both parties. Typically it takes 7 days to complete. But if the sites are in remote location, it may take up to 14 days to complete the installations.(this is a rough estimation)
 5. 60% advance payment required with work order & 40% after installation complete with job completion certificate.
 6. All electrical wiring inside the branch needs to be done by qualified electrician by the buyer.
 7. **Power Line Tech.** is responsible for energy source on the site. If **Power Line Tech.** does the internal wiring, there will be additional wiring charge.
 8. There must be Battery and electrical board storage room (electrical room) provided.
- All installation related work will be done by **Power Line Tech.** except:
- a. Buyer needs to clear out any permanent structure, tree etc.
 - b. Buyer needs to prepare the site for solar panel installation based on **Power Line Tech.** recommendation.
9. Roof clearance (Of any permanent structure, pipes, Antenna etc) has to be done by the System purchaser. Job start will depend on the roof clearance timeline.


Head Office Address

House # 22, Road # 04, Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # kha, 99/1/ka, East Namapara Koborstan Road, Desco East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2019@gmail.com

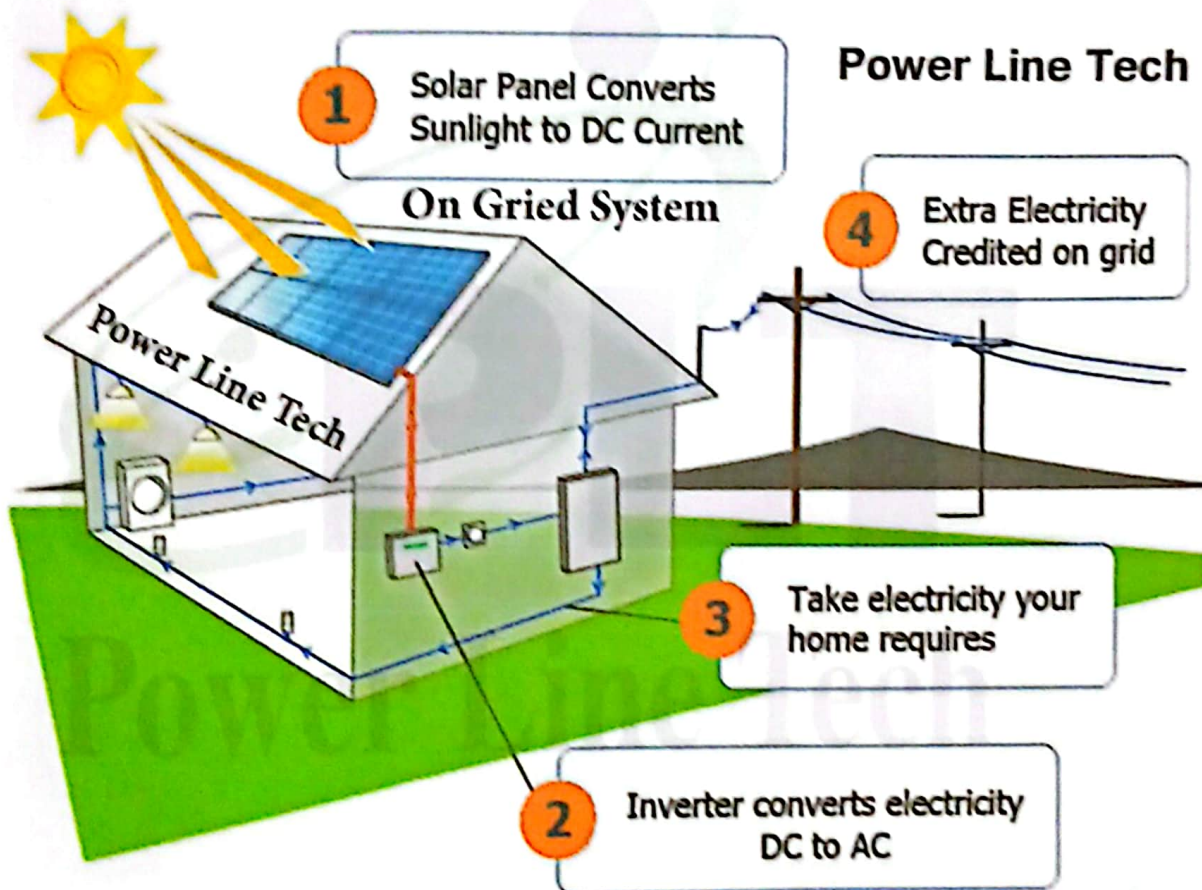

Signature

Head Office Address

House # 22, Road # 04, Nikunja # 02, Khilkhet, Dhaka - 1229

Office Branch Address

House # 14a, 89/14a, East Namapara Koborstan Road, Desco East Side, Khilkhet, Dhaka - 1229

Email: powerlinetech2019@gmail.com